



DRUKREGELAAR MET VASTE DRUK
DÉTENDEUR À PRESSION FIXE

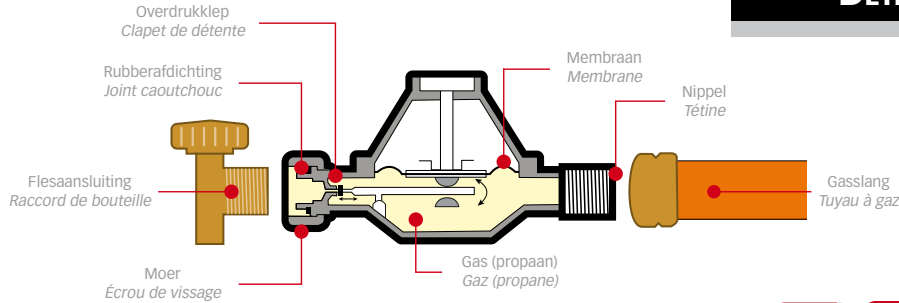

| code | | | | | | | min. | € |
|-----------|--|---------------|-------|----------|---|---|------|-------|
| MA 802000 | | 5420000038431 | 2 bar | 0,074 kg | - | 1 | 1 | 25,30 |
| MA 801000 | | 5420000038424 | 4 bar | 0,076 kg | - | 1 | 1 | 28,10 |

DRUKREGELAAR MET INSTELBARE DRUK
DÉTENDEUR À PRESSION VARIABLE

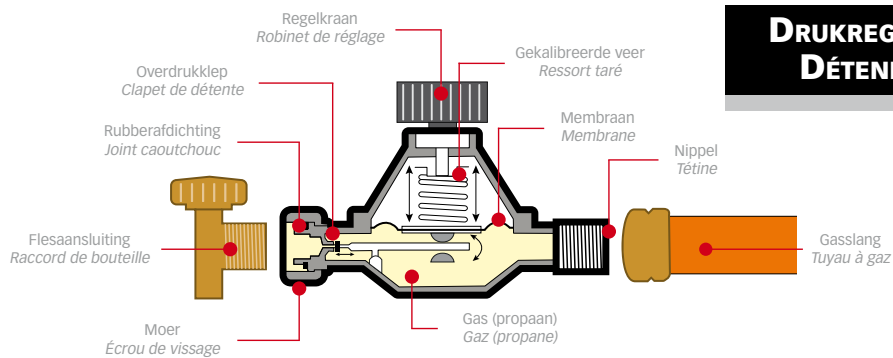

MA 803040



MA 803685



MA 803690

| code | | | | | | | min. | € |
|--|--|---------------|-----------|----------|---|---|------|-------|
| MA 803040 | | 5420000038448 | 0,5-4 bar | 0,220 kg | - | 1 | 1 | 31,40 |
| Met slangbreukventiel • Avec valve de rupture | | | | | | | | |
| MA 803685 | | 5420000038455 | 0,5-4 bar | 0,304 kg | - | 1 | 1 | 48,00 |
| Met slangbreukventiel en manometer • Avec valve de rupture et manomètre | | | | | | | | |
| MA 803690 | | 5420000038882 | 0,5-4 bar | 0,406 kg | - | 1 | 1 | 60,20 |



| | MA 802000 | MA 801000 | MA 803040 | MA 803685 | MA 803690 |
|--------------------------------------|--------------|--------------|--------------|--------------|----------------|
| Aansluiting • Raccord | 3/8" L/G | 3/8" L/G | 3/8" L/G | 3/8" L/G | 3/8" L/G |
| Gastype • Type de gaz | Propa(a)n(e) | Propa(a)n(e) | Propa(a)n(e) | Propa(a)n(e) | Propa(a)n(e) |
| Druk • Pression | 2 bar | 4 bar | 0,5 - 4 bar | 0,5 - 4 bar | 0,5 - 4 bar |
| Slangbreukventiel • Valve de rupture | - | - | - | ✓ | ✓ |
| Manometer • Manomètre | - | - | - | - | ✓ |
| Maximale afgifte • Capacité maximale | 8 kg / h | 8 kg / h | 8 kg / h | 8 kg / h | 10 - 14 kg / h |